




Private bind

Entry-level desktop home range for manual punching and binding For use with low volumes of books at home.

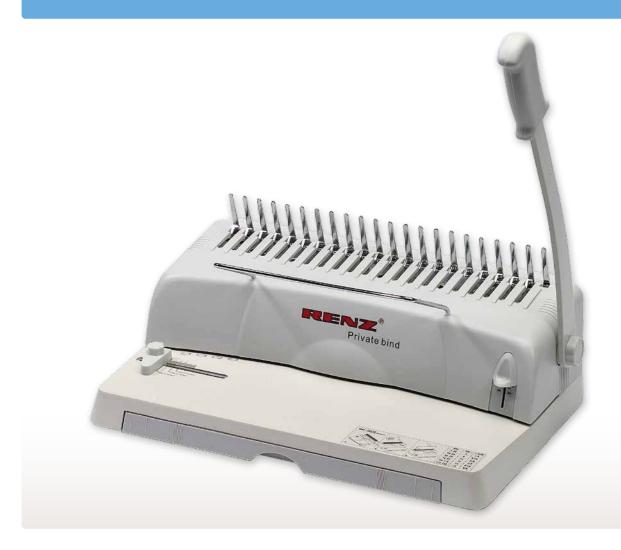

Customer benefits:

- Binds up to 150 sheets
- Staggered punching pins for better punching
- A4, A5 format changes
- Adjustable side lay for perfect punching registration
- Easy to empty sliding waste tray
- Measure your document
- Compact design

Maximum:



Width 300 mm



Punch up to 1.0 mm



Bind up to 15 mm

Output:



Max. punched sheets per hour **2,000**



Max. bound products per hour **50**









Insert the paper into the punching slot and pull the lever forward to punch the paper.



Loading

Once the punching is complete, load the required comb onto the top of the machine.



Insertion

Now, position the sheets on top of the plastic comb. Once finished, push the leaver back.



To finish

Remove the document.





21 rings in A4 15 rings in A5



Customer friendly colour packaging.

Max. punching width: Min. unpunched length: Max. unpunched length: Max. unpunched length: Max. punching thickness: I mm Manual Punch pattern: B x 3 mm Pitch: US Gelectable punch pins (QSA): Mariable margin depth: Mo Binding thickness: I - 15 mm Binding element Ø: Min. binding width: Max. binding width: Max. binding width: Max. binding operation: Manual Moo. of books output per hr: Machine dimensions L x W x H: Max. 300 mm Machine dimensions L x W x H: Max. 390 x 230 x 290 mm
Max. punching width: Min. unpunched length: Max. unpunched length: Max. punching thickness: 1 mm Punching operation: Manual Punch pattern: 8 x 3 mm Pitch: US Selectable punch pins (QSA): No Variable margin depth: Binding thickness: 1 - 15 mm Binding element Ø: Min. binding width: Min. binding width: Min. binding width: Binding operation: Manual Max. binding operation: Manual No. of books output per hr: Machine dimensions L x W x H: 300 mm
Min. unpunched length: Max. unpunched length: Max. unpunched length: Max. punching thickness: 1 mm Punching operation: Punch pattern: Pitch: US Selectable punch pins (QSA): Variable margin depth: Binding thickness: 1 - 15 mm Binding element Ø: 6 - 16 mm Min. binding width: 10 mm Max. binding width: 300 mm Binding operation: Manual No. of books output per hr: Machine dimensions L x W x H: 390 x 230 x 290 mm
Max. unpunched length: Max. punching thickness: 1 mm Punching operation: Manual Punch pattern: 8 x 3 mm Pitch: US Selectable punch pins (QSA): No Variable margin depth: No Binding thickness: 1 - 15 mm Binding element Ø: 6 - 16 mm Min. binding width: 10 mm Max. binding width: 300 mm Binding operation: Manual No. of books output per hr: 50 Machine dimensions L x W x H: 390 x 230 x 290 mm
Max. punching thickness: 1 mm Punching operation: Manual Punch pattern: 8 x 3 mm Pitch: US Selectable punch pins (QSA): Variable margin depth: Binding thickness: 1 - 15 mm Binding element Ø: 6 - 16 mm Min. binding width: 10 mm Max. binding width: 300 mm Binding operation: Manual No. of books output per hr: 50 Machine dimensions L x W x H: 390 x 230 x 290 mm
Punching operation: Manual Punch pattern: 8 x 3 mm Pitch: US Selectable punch pins (QSA): No Variable margin depth: No Binding thickness: 1 - 15 mm Binding element Ø: 6 - 16 mm Min. binding width: 10 mm Max. binding width: 300 mm Binding operation: Manual No. of books output per hr: 50 Machine dimensions L x W x H: 390 x 230 x 290 mm
Punch pattern: 8 x 3 mm Pitch: US Selectable punch pins (QSA): No Variable margin depth: No Binding thickness: 1 - 15 mm Binding element Ø: 6 - 16 mm Min. binding width: 10 mm Max. binding width: 300 mm Binding operation: Manual No. of books output per hr: 50 Machine dimensions L x W x H: 390 x 230 x 290 mm
Pitch: US Selectable punch pins (QSA): Variable margin depth: No Binding thickness: 1 - 15 mm Binding element Ø: 6 - 16 mm Min. binding width: 10 mm Max. binding width: 300 mm Binding operation: Manual No. of books output per hr: Machine dimensions L x W x H: 390 x 230 x 290 mm
Selectable punch pins (QSA): Variable margin depth: Binding thickness: 1 - 15 mm Binding element Ø: 6 - 16 mm Min. binding width: 10 mm Max. binding width: 300 mm Binding operation: Manual No. of books output per hr: 50 Machine dimensions L x W x H: 390 x 230 x 290 mm
Variable margin depth: Binding thickness: 1 - 15 mm Binding element Ø: 6 - 16 mm Min. binding width: 10 mm Max. binding width: 300 mm Binding operation: Manual No. of books output per hr: 50 Machine dimensions L x W x H: 390 x 230 x 290 mm
Binding thickness: 1 - 15 mm Binding element Ø: 6 - 16 mm Min. binding width: 10 mm Max. binding width: 300 mm Binding operation: Manual No. of books output per hr: 50 Machine dimensions L x W x H: 390 x 230 x 290 mm
Binding element Ø: Min. binding width: Max. binding width: Binding operation: No. of books output per hr: Machine dimensions L x W x H: Max. binding width: Manual Manual Manual Machine dimensions L x W x H: Manual Manual Manual
Min. binding width: Max. binding width: Binding operation: No. of books output per hr: Machine dimensions L x W x H: 10 mm Manual Manual 50 Machine dimensions L x W x H: 390 x 230 x 290 mm
Max. binding width: 300 mm Binding operation: Manual No. of books output per hr: 50 Machine dimensions L x W x H: 390 x 230 x 290 mm
Binding operation: Manual No. of books output per hr: 50 Machine dimensions L x W x H: 390 x 230 x 290 mm
No. of books output per hr: 50 Machine dimensions L x W x H: 390 x 230 x 290 mm
Machine dimensions L x W x H: 390 x 230 x 290 mm
201
Machine weight: 3.6 kg
Machine packaging dimensions L x W x H: 430 x 170 x 280 mm
Machine weight with packaging: 4.5 kg
Power requirement: